


Messerstahl 400 HB / 500HB

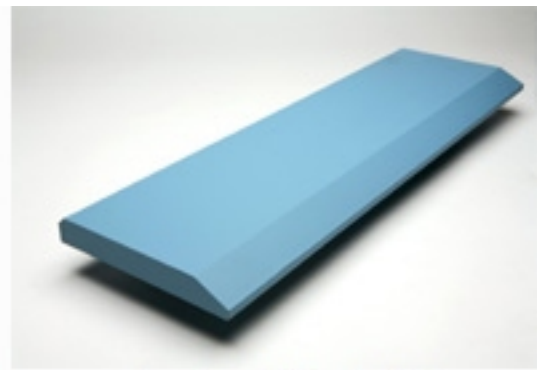

T mm	W mm	W ₁ mm	T ₁ mm	Fase H	r	Gewicht kg/m	Länge mm
12*	100	20	4	--	25,0°	9,2	3000
16	150	25	4	5x45°	25,0°	17,8	6100
20	150	30	6	5x45°	25,0°	22,1	6100
20	200	30	6	5x45°	25,0°	30,1	6100
25	200	37	8	5x45°	25,0°	37,3	6100
25	250	37	8	5x45°	25,0°	47,3	6100
30	200	44	10	8x45°	25,0°	44,1	6100
30	250	44	10	8x45°	25,0°	56,1	6100
30	270	44	10	8x45°	25,0°	60,9	6100
35	270	50	12	9x45°	25,0°	70,6	6100
30	300	50	12	9x45°	25,0°	65,5	6100
35	300	50	12	9x45°	25,0°	77,3	6100
40	300	55	14	9x45°	25,0°	89,8	6100
50*	300	70	17	11x45°	25,0°	110,1	4000
50*	300	70	17	11x45°	25,0°	110,1	6000